



Articulating Boom Lift GTZZ-25J

Specification

- *Lift capacity : 230KG
- *Width stowed : 2.49m
- *Working height : 26.9m

Features

- *Easy to operation, good stability, no impact
- *Flexible boom, more practical and complex and nurturing work space
- *Good gradeability, more radius and the whole machine stable

Technical Parameters

Main feature


Operating range

Model

GTZZ-25J


Performance

Working height maximum	26.9m
Platform height maximum	24.9m
Horizontal height maximum	16m
Up and over clearance max.	10.5m
Length -stowed[D]	11.28m
Width-stowed[E]	2.49m
Height-stowed[C]	2.86m
Platform size(L×W)[A*B]	1.83*0.76m*1.1m
Wheel base[F]	3.05m
Ground clearance[G]	0.38m

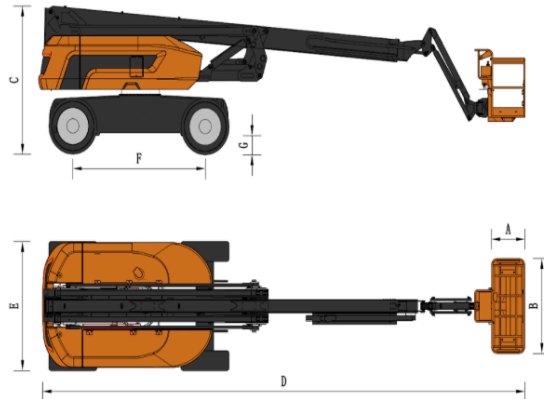

Dimension

Lift capacity	230kg
Max platform occupancy	2
Drive speed-stowed(max)	4.85km/h
Drive speed-raised(max)	1.1km/h
Gradeability-stowed	45%
Turning radius-inside	2.5m
Turning radius-outside	5.98m
Working slope maximum	385/65-24
Tyre	5°

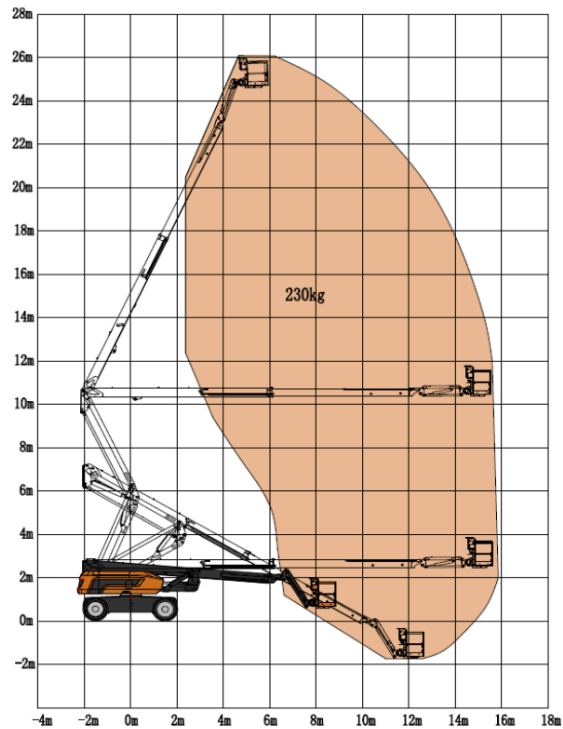

Power

Power source	Cummins
Drive & steering	4WD*2WS

Weight

1.Chassis

- ◇Wide chassis makes the lower part of the Equipment which can bear the load balance to enhance stability.
- ◇16/70/20 Solid Tyre, it can keep stable not only in a variety of complex conditions, but also enhance the ground friction, then the equipment is more stable in operation, and climbing easier.
- ◇The steering system adopts double oil cylinder and Hydra steering system, with 40Cr steering linkage to ensure the same direction.
- ◇Floating leveling device will start automatically when the device encountered under the condition of uneven ground,to ensure the balance of equipment with slope of 6 degrees ,then strengthen the safety and adaptability.

2.Rotation table

- ◇360°continuous rotation,with 50Cr rotary support
- ◇Emergency safety pump. The operator can use emergency safety pump to fall safely,when the equipment is working at high altitude which can not be down.
- ◇Constant pressure pump of Danfoss USA or Rexroth German,it avoid oil leakage caused by gear pump damage in long -term construction
- ◇The electric control system of centralized electric control box is used to ensure the safety of equipment operation
- ◇Ground control console and platform control console, the former has a large screen display, with self diagnostic screen, without connected to the computer,then customers can easily understand the calibration status of equipment and parameters, which is convenient debugging and testing.
- ◇Controller of IFM Germany can enhance system stability
- ◇Turntable safety lock,to avoid the damage in the transport and maintenance of arm rotation
- ◇Glass fiber steel cover make the whole equipment nice and durable

3.Boom

- ◇The boom structure adopts 70 high strength steel to ensure the safety of equipment construction
- ◇When the boom is extended, the side boom adopts a sleeve type pipe or line design, which is beautiful and convenient.
- ◇Germany imported IGUS chain, stable performance ,long life and never rust.

4.Platform

- ◇Imported overweight sensor to ensure operator load safely in the construction
- ◇Control system with three joystick to work easily in the multiple compound action
- ◇Foot pedal,handle is effective under pressing foot pedal
- ◇Self lock door to keep safe
- ◇Platform guardrails can rotate around 160 degrees to work conveniently

Technical Parameters

Main feature

Operating range

